



## ORCA MIOILTD-D 19.

**IN DIESEN FARBEN VORHANDEN:**



SCHWARZ-ROT  
(MATT-GLÄNZEND)



SCHWARZ-GRAU



SCHWARZ-ROT-WEISS  
(MATT-GLÄNZEND)



HELLBLAU-ORANGE (MATT)



MINZE-SCHWARZ  
(GLÄNZEND)



GELB-ROT (GLÄNZEND)

## TECHNISCHE EIGENSCHAFTEN UND OPTIONEN

<b>RAHMEN</b>	Orbea Orca carbon OMR Disc, monocoque construction, tapered 1-1/8" - 1,5", BB 386mm, powermeter compatible, Thru Axle 12mm x 142mm rear, internal cable routing, EC/DC compatible, 27,2mm seat tube.
<b>GABEL</b>	Orbea Orca OMR Disc carbon fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts, Thru axle 12 x 100mm
<b>KURBEL</b>	Shimano Dura-Ace 9100 34x50t
	Shimano Dura-Ace 9100 39x53t
	Rotor Aldhu 36x52t
	Rotor 2INpower DM 34x50t
	Rotor 2INpower DM 36x52t
<b>STEUERSATZ</b>	FSA 1-1/8" - 1-1/2" Integrated Carbon Cup Light Bearings
<b>LENKER</b>	FSA K-Force Compact
	FSA Energy Compact
<b>VORBAU</b>	FSA OS-99 CSI
	FSA Energy
<b>HEBEL</b>	Shimano R9170
<b>BREMSEN</b>	Shimano R9170 Hydraulic Disc
<b>KASSETTE</b>	Shimano Dura-Ace 9100 11-28t 11-Speed
	Shimano Dura-Ace 9100 11-25t 11-Speed
	Shimano Dura-Ace 9100 11-30t 11-Speed
<b>SCHALTWERK</b>	Shimano Dura-Ace 9150 Di2
<b>UMWERFER</b>	Shimano Dura-Ace 9150 Di2
<b>KETTE</b>	Shimano HG 901
<b>FELGE</b>	DT ARC 1400 Dicut DB 48 Carbon CL TL
	Fulcrum Racing 500 DB
<b>REIFEN</b>	Hutchinson Fusion 5 All SeasonTLR 700x25
	Hutchinson Fusion 5 All Season TLR 700x28
<b>PEDALE</b>	N/A
<b>SATTELSTÜTZE</b>	FSA K-Force Light SB25 27.2x400mm Di2 compatible
	FSA S-LK Offset SB0 27,2x350/400mm
	FSA S-LK Offset SB20 27,2x350/400mm
	FSA K-Force Offset SB0 27,2x350/400mm
<b>SATTEL</b>	Selle Italia SLR Kit Carbonio
	Prologo Scratch-2 Tirox size 143 mm Black
	Prologo Dimension T4,0 Black


## GEOMETRIE

GRÖßE	47	49	51	53	55	57	60
<b>1 - SEAT_TUBE</b>	440	460	480	500	520	540	570
<b>2 - TOP_TUBE</b>	510	522	536	548.5	560	576	590
<b>3 - HEAD_TUBE</b>	104	111	130	148	168	186	213
<b>4 - CHAIN_STAY</b>	414						
<b>5 - BB_HEIGHT</b>	269.5	269.5	269.5	271.5	271.5	271.5	271.5
<b>6 - BB_DROP</b>	72	72	72	70	70	70	70
<b>7 - WHEELBASE</b>	972	975	980	981	991	1002	1027
<b>8 - HEAD_ANGLE</b>	71°	71.5°	72.2°	72.8°	73°	73.2°	73.2°
<b>9 - SEAT_ANGLE</b>	74.5°	74°	73.7°	73.5°	73.5°	73.2°	73.2°
<b>10 - STANDOVER</b>	729	742	758	780	800	817	844
<b>11 - REACH</b>	370	375	380	385	391	398	404
<b>12 - STACK</b>	506	515	533	552	572	590	616
<b>13 - FORK_LENGTH</b>	370						
<b>14 - OFFSET</b>	48	48	48	43	43	43	43

## ERGONOMIE

GRÖßE	KURBELLÄNGE	VORBRAU	LENKER
47	170	90	400
49	170	100	400
51	170	100	420
53	170	110	420
55	172	110	420
57	172	110	440
60	175	120	440

\* Das Lenkermaß ist Mitte-Mitte

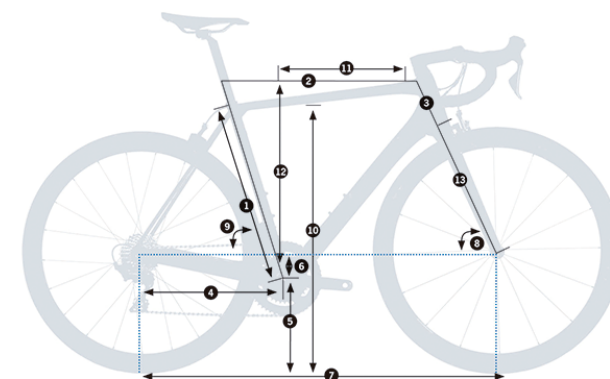

**LENKERBAND**

Velo Anti-Slippery/Shock Proof

--