

SPÉCIFICATIONS ET OPTIONS

CADRE	Orbea Orca carbon OMR, monocoque construction, tapered 1-1/8" - 1,5", BB 386mm, powermeter compatible, internal cable routing, EC/DC compatible, 27,2mm seat tube.
FOURCHE	Orca OMR carbon fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts
PLATEAU DE PEDALIER	Shimano Ultegra R8000 34x50t
	Rotor 2INpower 34x50t
	Rotor Flow 34X50At
	Shimano Ultegra R8000 39x53t
DIRECTION	FSA 1-1/8" - 1-1/2" Integrated Carbon Cup Light Bearings
CINTRE	FSA Energy Compact
	FSA K-Force Compact
	Vision Metron 4D Compact
	Vision Metron 5D Compact
POTENCE	FSA Energy
	FSA OS-99 CSI
MANETTES	Shimano Ultegra R8000
FREINS	Shimano Ultegra R8000
PIGNON	Shimano Ultegra R8000 11-28t 11-Speed
	Shimano Ultegra R8000 11-30t 11-Speed
	Shimano Ultegra R8000 11-25t 11-Speed
DERAILLEUR ARRIÈRE	Shimano Ultegra R8000 SS
DERAILLEUR AVANT	Shimano Ultegra R8000
CHAÎNE	Shimano HG 701
ROUES	Mavic Ksyrium Clincher
	DT PR 1600 Spline 32
	Mavic Ksyrium Elite Clincher
	FULCRUM Racing Quattro Carbon
PNEUS	Vittoria Open Corsa Competition G+ 700x25c
	Hutchinson Fusion 5 All SeasonTLR 700x25
	Hutchinson Fusion 5 All SeasonTLR 700x28
PÉDALE	N/A
TIGE SELLE	FSA S-LK SB20 27.2x400mm Di2 compatible
	FSA S-LK SB0 27,2x350/400mm
	FSA K-Force SB0 27,2x350/400mm
	FSA K-Force SB25 27,2x350/400mm
SELLE	Hard Black Scratch-2 Tirox size 143 mm


GÉOMÉTRIE

TAILLE	47	49	51	53	55	57	60
1 - SEAT_TUBE	440	460	480	500	520	540	570
2 - TOP_TUBE	510	522	536	548,5	560	576	590
3 - HEAD_TUBE	104	111	130	148	168	186	213
4 - CHAIN_STAY	408						
5 - BB_HEIGHT	269,5	269,5	269,5	271,5	271,5	271,5	271,5
6 - BB_DROP	72	72	72	70	70	70	70
7 - WHEELBASE	972	975	980	981	991	1002	1027
8 - HEAD_ANGLE	71°	71,5°	72,2°	72,8°	73°	73,2°	73,2°
9 - SEAT_ANGLE	74,5°	74°	73,7°	73,5°	73,5°	73,2°	73,2°
10 - STANDOVER	729	742	758	780	800	817	844
11 - REACH	370	375	380	385	391	398	404
12 - STACK	506	515	533	552	572	590	616
13 - FORK_LENGTH	370						
14 - OFFSET	48	48	48	43	43	43	43

ERGONOMIE

TAILLE	BIELLE	POTENCE	CINTRE
47	170	90	400
49	170	100	400
51	170	100	420
53	170	110	420
55	172	110	420
57	172	110	440
60	175	120	440

* La dimension du guidon est centre-centre

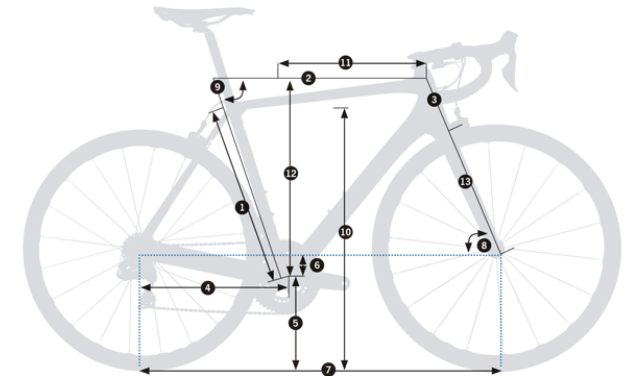

Prologo Nago Evo Space Tirox size 141mm
Black

Selle Italia SLR Kit Carbonio Black

RUBAN DE GUIDON Velo Anti-Slippery/Shock Proof

FREIN ARRIÈRE Shimano Ultegra R8000
