

ORBEA



ORCA M20iTEAM-D 19.

È DISPONIBILE IN QUESTI COLORI:



NERO-ROSSO
(OPACO-LUCIDO)



NERO-GRIGIO



NERO-ROSSO-BIANCO
(OPACO-LUCIDO)



BLU-ARANCIONE (OPACO)



VERDE MENTA-NERO
(LUCIDO)



GIALLO-ROSSO (LUCIDO)

SPECIFICHE E OPTIONAL

TELAIO	Orbea Orca carbon OMR Disc, monocoque construction, tapered 1-1/8" - 1,5", BB 386mm, powermeter compatible, Thru Axle 12mm x 142mm rear, internal cable routing, EC/DC compatible, 27,2mm seat tube.
FORCELLA	Orbea Orca OMR Disc carbon fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts, Thru axle 12 x 100mm
GUARNITURA	Shimano Ultegra R8000 34x50t Shimano Ultegra R8000 39x53t Rotor Aldhu 36x52t Rotor 2INpower DM 34x50t Rotor 2INpower DM 36x52t
SERIE STERZO	FSA 1-1/8" - 1-1/2" Integrated Carbon Cup Light Bearings
MANUBRIO	FSA Energy Compact FSA K-Force Compact
ATTACCO	FSA Energy FSA OS-99 CSI
LEVE	Shimano ST-8070
FRENI	Shimano R8070 Hydraulic Disc
PIGNONI	Shimano Ultegra R8000 11-28t 11-Speed Shimano Ultegra R8000 11-25t 11-Speed Shimano Ultegra R8000 11-30t 11-Speed
CAMBIO	Shimano Ultegra Di2 R8050 SS
DERAGLIATORE	Shimano Ultegra Di2 R8050
CATENA	Shimano HG 701
RUOTE	FULCRUM Racing 500 DB DT Swiss ARC1400 Dicut 48 DB
PNEUMATICO	Vittoria Open Corsa Competition G+ 700x25c Hutchinson Fusion 5 All Season TLR 700x25 Hutchinson Fusion 5 All Season TLR 700x28
PEDALI	N/A
REGGISELLA	FSA SL-K SB20 27.2x350mm Di2 compatible FSA S-LK Offset SB0 27,2x350/400mm FSA K-Force Offset SB0 27,2x350/400mm FSA K-Force Offset SB25 27,2x350/400mm
SELLA	Hard Black Scratch-2 Tirox size 143 mm Prologo Dimension T4,0 Black Selle Italia SLR Kit Carbonio Black


GEOMETRIA

TAGLIA	47	49	51	53	55	57	60
1 - SEAT_TUBE	440	460	480	500	520	540	570
2 - TOP_TUBE	510	522	536	548.5	560	576	590
3 - HEAD_TUBE	104	111	130	148	168	186	213
4 - CHAIN_STAY	414						
5 - BB_HEIGHT	269.5	269.5	269.5	271.5	271.5	271.5	271.5
6 - BB_DROP	72	72	72	70	70	70	70
7 - WHEELBASE	972	975	980	981	991	1002	1027
8 - HEAD_ANGLE	71°	71.5°	72.2°	72.8°	73°	73.2°	73.2°
9 - SEAT_ANGLE	74.5°	74°	73.7°	73.5°	73.5°	73.2°	73.2°
10 - STANDOVER	729	742	758	780	800	817	844
11 - REACH	370	375	380	385	391	398	404
12 - STACK	506	515	533	552	572	590	616
13 - FORK_LENGTH	370						
14 - OFFSET	48	48	48	43	43	43	43

ERGONOMIA

TAGLIA	BIELLA	ATTACCHO	MANUBRIO
47	170	90	400
49	170	100	400
51	170	100	420
53	170	110	420
55	172	110	420
57	172	110	440
60	175	120	440

* La misura del manubrio è centro-Centro

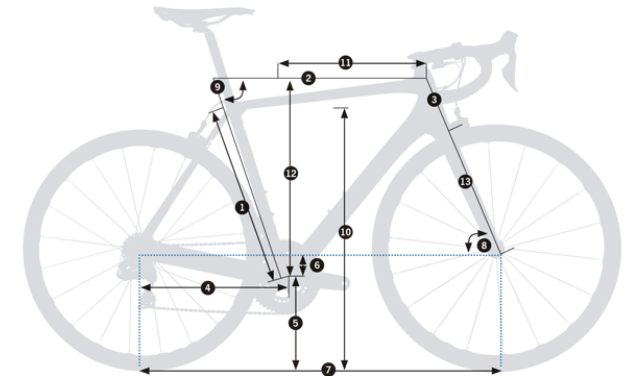

**NASTRO PER
MANUBRIO**

Velo Anti-Slippery/Shock Proof

--
