



ESPECIFICACIONES Y OPCIONES

CUADRO	Orbea Occam Hydro High Polished Triple Butted. Concentric Boost 12x148 rear axle. Pure Trail geometry. Internal cable routing. Asymmetric design. 29" wheels. Linkage compatible with OC multitool
AMORTIGUADOR	Fox FLOAT X Performance 2-Position Evol LV custom tune 210x55mm
HORQUILLA	Fox 36 Float Performance 150 Grip 3-Position QR15x110
PLATO/BIELA	Race Face Aeffect 32t
DIRECCION	Acros Alloy 1-1/8 - 1-1/2" Integrated
MANILLAR	OC Mountain Control MC30, Rise20, Width 800
POTENCIA	Alloy 3D forged, 35mm interface, -7º
MANETAS	Shimano SLX M7100 I-Spec EV
FRENO	Shimano M6100 Hydraulic Disc
PIÑON	Shimano CS-M7100 10-51t 12-Speed
CAMBIO	Shimano SLX M7100 SGS Shadow Plus
CADENA	Shimano M6100
RUEDA	Race Face AR 30c Tubeless Ready
CUBIERTA	Maxxis Dissector 2.40" 60 TPI 3CMaxxTerra Exo TLR
TIJA SILLIN	OC Mountain Control MC20, 31.6mm, Dropper
REMOTO DE TIJA	Shimano SL-MT500 I-Spec EV
SILLIN	Fizik Taiga S-alloy rail
PUÑOS	OC Lock On
EJE RUEDA DELANTERO	N/A
OTROS	otros

OCCAM H2O LT 2023.

ESTÁ EN ESTOS COLORES:



GLITTER
ANTHRACITE-METALLIC RED
[GLOSS]




METALLIC DARK GREEN-LIME
GREEN (MATT)



LEO ORANGE-BLACK [GLOSS]

GEOMETRÍA

TALLA	S	M	L	XL	S-LT	M-LT	L-LT	XL-LT
1 - SEAT_TUBE	381	419	457	508	381	419	457	508
2 - TOP_TUBE	565	592	619	649	565	592	619	649
3 - HEAD_TUBE	95	105	120	140	95	105	120	140
4 - CHAIN_STAY	440							
5 - BB_HEIGHT	336							
6 - BB_DROP	35	35	35	35	32	32	32	32
7 - WHEELBASE	1165	1194	1224	1259	1165	1194	1224	1259
8 - HEAD_ANGLE	66º	66º	66º	66º	65.5º	65.5º	65.5º	65.5º
9 - SEAT_ANGLE	77º	77º	77º	77º	76.5º	76.5º	76.5º	76.5º
10 - STANDOVER	710	736	766	776	710	736	766	776
11 - REACH	425	450	474	500	425	450	474	500
12 - STACK	604	613	627	646	604	613	627	646
13 - FORK_LENGTH	554	554	554	554	554	561	561	561
14 - OFFSET	44							

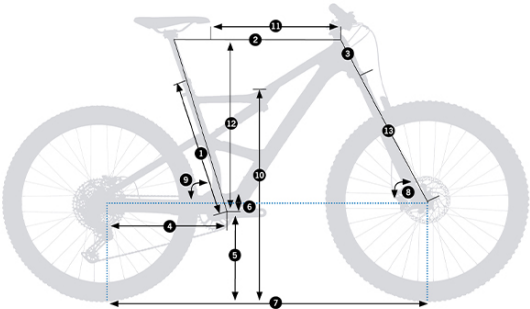

ERGONOMÍA

TALLA	BIELA	POTENCIA	MANILLAR	TIJA TELESCÓPICA
S	170	45	800	390/125
M	170	45	800	440/150
L	175	55	800	440/150
XL	175	55	800	480/170

* La medida del manillar es centro-centro