

ORBEA



ESPECIFICACIONES Y OPCIONES

CUADRO	Orbea Occam OMR. Concentric Boost 12x148 rear axle. Pure Trail geometry. Internal cable routing. Asymmetric design. 29" wheels
AMORTIGUADOR	Fox Float DPS Factory 3-Position Evol Kashima custom tune 210x50mm
HORQUILLA	Fox 34 Float Factory 140 FIT4 3-Pos-Adj QR15x110 Kashima
PLATO/BIELA	Race Face ERA 32t
DIRECCION	Acros Alloy 1-1/8 - 1-1/2" Integrated
MANILLAR	OC Mountain Control MC10 Carbon, Rise 20, Width 800
POTENCIA	OC Mountain Control MC10 Alu SL, 0º
MANETAS	Shimano XTR M9100
FRENO	Shimano XTR M9120Hydraulic Disc
PIÑON	Shimano XTR M9100 10-51t 12-Speed
CAMBIO	Shimano XTR M9100 SGS Shadow Plus
CADENA	Shimano CN-9100
RUEDA	OQUO Mountain Performance MP30LTD Carbon
CUBIERTA	Maxxis Dissector 2.40" 60 TPI 3CMaxxTerra Exo TLR
CUBIERTA	Maxxis Rekon 2.40" FB 60 TPI Dual Exo TR
TIJA SILLIN	Fox Transfer SL Factory Kashima Dropper 31.6
REMOTO DE TIJA	Shimano SL-MT-800 I-Spec EV
SILLIN	Fizik Antares R1 142mm
GUIACADENA	Orbea OC chainguide
EJE RUEDA DELANTERO	N/A
HERRAMIENTAS	OC FLP Multitool MT-20, Hex 2, 3, 4, 5
OTROS	otros

OCCAM M-LTD 2023.

ESTÁ EN ESTOS COLORES:




ICE GREEN-JADE GREEN
CARBON VIEW (GLOSS)



INFINITY GREEN CARBON
VIEW (MATT-GLOSS)

GEOMETRÍA

TALLA	S	M	L	XL	S-LT	M-LT	L-LT	XL-LT
1 - SEAT_TUBE	381	419	457	508	381	419	457	508
2 - TOP_TUBE	565	592	619	649	565	592	619	649
3 - HEAD_TUBE	95	105	120	140	95	105	120	140
4 - CHAIN_STAY	440							
5 - BB_HEIGHT	336							
6 - BB_DROP	35	35	35	35	32	32	32	32
7 - WHEELBASE	1165	1194	1224	1259	1165	1194	1224	1259
8 - HEAD_ANGLE	66º	66º	66º	66º	65.5º	65.5º	65.5º	65.5º
9 - SEAT_ANGLE	77º	77º	77º	77º	76.5º	76.5º	76.5º	76.5º
10 - STANDOVER	710	736	766	776	710	736	766	776
11 - REACH	425	450	474	500	425	450	474	500
12 - STACK	604	613	627	646	604	613	627	646
13 - FORK_LENGTH	554	554	554	554	554	561	561	561
14 - OFFSET	44							

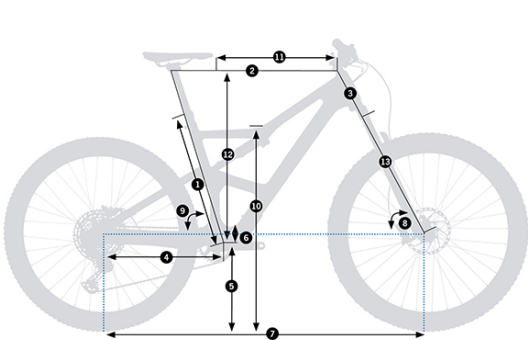

ERGONOMÍA

TALLA	BIELA	POTENCIA	MANILLAR	TIJA TELESCÓPICA
S	170	40	800	455/125
M	170	40	800	480/150
L	175	50	800	480/150
XL	175	50	800	480/150

* La medida del manillar es centro-centro