

**ORBEA**



## ORCA M20TEAM 19.

BESCHIKBAAR IN DEZE KLEUREN:



ZWART-ROOD (DOF-GLOSS)



ZWART-GRIJS



ZWART-ROOD-WIT  
(DOF-GLOSS)



BLAUW-ORANJE (DOF)



MUNT-ZWART (GLOSS)



GEEL-ROOD (GLOSS)

## SPECIFICATIES AND OPTIES

<b>FIETSFRAME</b>	Orbea Orca carbon OMR, monocoque construction, tapered 1-1/8" - 1,5", BB 386mm, powermeter compatible, internal cable routing, EC/DC compatible, 27,2mm seat tube.
<b>VORK</b>	Orca OMR carbon fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts
<b>CRANKSET</b>	Shimano Ultegra R8000 34x50t Shimano Ultegra R8000 39x53t Rotor Aldhu 36x52t Rotor 2INpower DM 34x50t Rotor 2INpower DM 36x52t
<b>BALHOOFDLAGER PERB</b>	FSA 1-1/8" - 1-1/2" Integrated Carbon Cup Light Bearings
<b>STUUR</b>	FSA Energy Compact FSA K-Force Compact
<b>STUURPEN</b>	FSA Energy FSA OS-99 CSI
<b>HENDELS</b>	Shimano Ultegra R8000
<b>REMMEN</b>	Shimano Ultegra R8000
<b>KETTINGWIEL</b>	Shimano Ultegra R8000 11-28t 11-Speed Shimano Ultegra R8000 11-25t 11-Speed Shimano Ultegra R8000 11-30t 11-Speed
<b>ACHTERDERAILLEUR</b>	Shimano Ultegra R8000 SS
<b>VOORDERAILLEUR</b>	Shimano Ultegra R8000
<b>KETTING</b>	Shimano HG 701
<b>WIELEN</b>	Mavic Ksyrium UST DT Swiss ARC1400 Dicut 48 Vittoria Elusion Carbon 30
<b>BANDEN</b>	Vittoria Open Corsa Competition G+ 700x25c Hutchinson Fusion 5 All Season TLR 700x25 Hutchinson Fusion 5 All Season TLR 700x28
<b>TRAPPERS</b>	N/A
<b>ZADELPEN</b>	FSA SL-K SB20 27.2x350mm Di2 compatible FSA S-LK Offset SB0 27,2x350/400mm FSA K-Force Offset SB0 27,2x350/400mm FSA K-Force Offset SB25 27,2x350/400mm
<b>ZADEL</b>	Hard Black Scratch-2 Tirox size 143 mm Prologo Dimension T4,0 Black Selle Italia SLR Kit Carbonio Black


## GEOMETRIE

MAAT	47	49	51	53	55	57	60
<b>1 - SEAT_TUBE</b>	440	460	480	500	520	540	570
<b>2 - TOP_TUBE</b>	510	522	536	548,5	560	576	590
<b>3 - HEAD_TUBE</b>	104	111	130	148	168	186	213
<b>4 - CHAIN_STAY</b>	408						
<b>5 - BB_HEIGHT</b>	269,5	269,5	269,5	271,5	271,5	271,5	271,5
<b>6 - BB_DROP</b>	72	72	72	70	70	70	70
<b>7 - WHEELBASE</b>	972	975	980	981	991	1002	1027
<b>8 - HEAD_ANGLE</b>	71°	71,5°	72,2°	72,8°	73°	73,2°	73,2°
<b>9 - SEAT_ANGLE</b>	74,5°	74°	73,7°	73,5°	73,5°	73,2°	73,2°
<b>10 - STANDOVER</b>	729	742	758	780	800	817	844
<b>11 - REACH</b>	370	375	380	385	391	398	404
<b>12 - STACK</b>	506	515	533	552	572	590	616
<b>13 - FORK_LENGTH</b>	370						
<b>14 - OFFSET</b>	48	48	48	43	43	43	43

## ERGONOMIE

MAAT	CRANK	STEM	HANDLEBAR
47	170	90	400
49	170	100	400
51	170	100	420
53	170	110	420
55	172	110	420
57	172	110	440
60	175	120	440

\* De maat van het fietsstuur is centre-centre

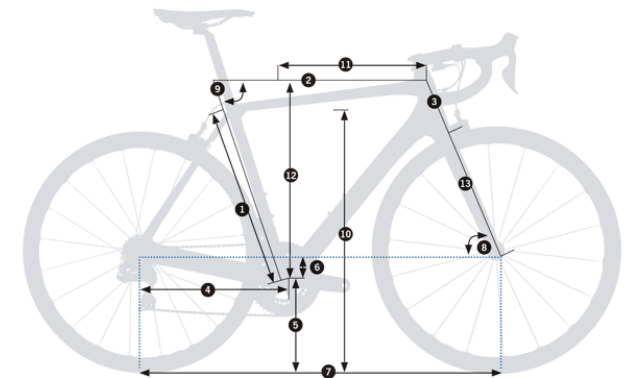

<b>HANDLEBAR PLUGS</b>	Velo Anti-Slippery/Shock Proof
------------------------	--------------------------------

<b>ACHTERREM</b>	Shimano Ultegra R8000
------------------	-----------------------

--	
----	--