

ORBEA



ORCA M20I-PRO 19.

ESTÁ EN ESTOS COLORES:



AZUL-ROJO BRILLO (BRILLO)



BLANCO-ROJO (MATE)



VERDE-AZUL (MATE)



GRAFITO-NEGRO

ESPECIFICACIONES Y OPCIONES

CUADRO	Orbea Orca carbon OMP, monoconoque, tapered 1-1/8" - 1,5", PF 86mm, powermeter compatible, internal cable routing, EC/DC compatible, 130mm rear spacing, 27,2mm seat tube.
HORQUILLA	Orca OMP carbon fork, full carbon steerer, tapered 1-1/8" - 1,5", carbon dropouts.
PLATO	Shimano Ultegra R8000 34x50t
	FSA Gossamer Pro 32x48t
	Shimano Ultegra R8000 39x53t
	Rotor Aldhu 36x52t
	Rotor 2INpower DM 34x50t
	Rotor 2INpower DM 36x52t
DIRECCION	FSA 1-1/8 - 1-1/2" Integrated Carbon Cup ACB Bearings
MANILLAR	FSA Energy Compact
	FSA K-Force Compact
POTENCIA	FSA Energy
	FSA OS-99 CSI
MANETAS	Shimano Ultegra R8050 Di2
FRENO	Shimano Ultegra R8000
PIÑON	Shimano Ultegra R8000 11-28t 11-Speed
	Shimano Ultegra R8000 11-25t 11-Speed
	Shimano Ultegra R8000 11-30t 11-Speed
	Shimano Ultegra R8000 11-32t 11-Speed (RD GS)
CAMBIO	Shimano Ultegra Di2 R8050 SS
	Shimano Ultegra RD-R8050 GS
DESVIADOR	Shimano Ultegra Di2 R8050
CADENA	KMC X11-EL
RUEDA	Mavic Ksyrium UST
	Fulcrum Racing 400 Clincher
	Vittoria Elusion Carbon 30
CUBIERTA	Vittoria Rubino Pro 700x25 120TPI G+
PEDALES	N/A
TIJA SILLIN	FSA SL-K SB20 27.2x350mm Di2 compatible
	FSA S-LK Offset SB0 27,2x350/400mm
	FSA K-Force Offset SB0 27,2x350/400mm
	FSA K-Force Offset SB25 27,2x350/400mm
SILLIN	Hard Black Scratch-2 Tirox size 143 mm
	Prologo Dimension T4,0 Black


GEOMETRÍA

TALLA	47	49	51	53	55	57	60
1 - SEAT_TUBE	410	440	470	490	510	530	560
2 - TOP_TUBE	514.8	520.55	537.9	548.5	563.7	576	590
3 - HEAD_TUBE	104	112	130	145	165	182	207.1
4 - CHAIN_STAY	405	405	405	405	408	408	408
5 - BB_HEIGHT	271.5						
6 - BB_DROP	70						
7 - WHEELBASE	969.6	967.58	986.92	984.77	996.32	1003.89	1012.53
8 - HEAD_ANGLE	71°	71.4°	71.8°	72.1°	72.5°	73°	73.5°
9 - SEAT_ANGLE	73.5°	73.5°	73.5°	73.5°	73.2°	73.2°	73.2°
10 - STANDOVER	708	726	751	771	791	807	835
11 - REACH	365	372	380	385	391	398	404
12 - STACK	506	515	533	552	572	590	616
13 - FORK_LENGTH	375						
14 - OFFSET	53	53	53	43	43	43	43

ERGONOMÍA

TALLA	BIELA	POTENCIA	MANILLAR
47	170	90	400
49	170	100	400
51	170	100	420
53	170	110	420
55	172	110	420
57	172	110	440
60	175	120	440

* La medida del manillar es centro-centro

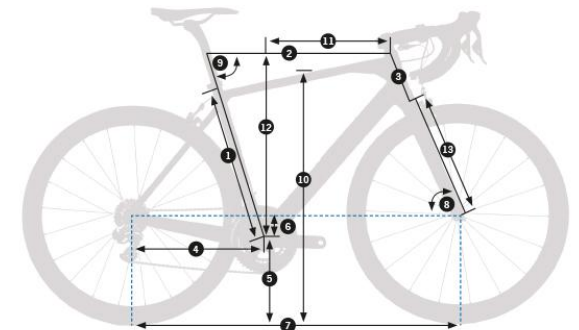

Selle Italia SLR Kit Carbonio Black

CINTA MANILLAR

Velo Anti-Slippery/Shock Proof

FRENO TRASERO

Shimano Ultegra R8000

--
