



ESPECIFICACIONES Y OPCIONES

CUADRO	Orbea Monocoque Race Carbon. Advanced Dynamics 160mm suspension technology. 29" wheels.Concentric Boost 12x148 rear axle. Pure Enduro geometry. Internal cable routing. ISCG05
AMORTIGUADOR	Fox DHX2 Factory 2-Position Adjust SLS Spring Cr 230x60mm
HORQUILLA	Fox 38 Float Factory 170 Grip2 QR15x110 Kashima
PLATO/BIELA	Race Face Era 32t
DIRECCION	Acros Alloy 1-1/8 - 1-1/2" Integrated
MANILLAR	OC Mountain Control MC10 Carbon, Rise 20, Width 800
POTENCIA	OC Mountain Control MC10 Alu SL, 0º
MANETAS	Shimano XTR M9100
FRENO	Shimano XTR M9120Hydraulic Disc
PIÑON	Shimano XTR M9100 10-51t 12-Speed
CAMBIO	Shimano XTR M9100 SGS Shadow Plus
CADENA	Shimano CN-9100
RUEDA	OQUO Mountain Control MC32LTD Carbon
CUBIERTA	Maxxis Assegai 2.50" WT FB 120 TPI 3C Maxx Terra EXO+ TR
CUBIERTA	Maxxis Minion DHR II 2.40" WT FB 120 TPI 3C Maxx Terra Exo+ TR
TIJA SILLIN	Fox Transfer Factory Kashima Dropper 31.6
REMOTO DE TIJA	Shimano SL-MT500 I-Spec EV
SILLIN	Fizik Taiga Kium rail
GUIACADENA	e*thirteen CL52 30-36t black
EJE RUEDA DELANTERO	N/A
ALMACENAJE	Accessories Containers
HERRAMIENTAS	OC Rear lever (Hex 6 & valve core removal)+OC FLP Multitool MT-20, Hex 2, 3, 4, 5
BIELETA	
TAPA_TOOLBOX	
OTROS	otros

RALLON M-LTD 2023.

ESTÁ EN ESTOS COLORES:



METALLIC MULBERRY (GLOSS) -BLACK (MATT)




GOLDEN SAND- BLACK (MATT)FOREST GREEN CARBON VIEW (MATT-GLOSS) - BLUE STONE (GLOSS)



GEOMETRÍA

TALLA	S H/L	M H/L	L H/L	XL H/L	S-MT	M-MT	L-MT	XL-MT
1 - SEAT_TUBE	415	415	435	460	415	415	435	460
2 - TOP_TUBE	572	599	626	653	573	600	627	655
3 - HEAD_TUBE	90	100	110	120	90	100	110	120
4 - CHAIN_STAY	440	440	440	440	438	438	438	438
5 - BB_HEIGHT*	350/343	350/343	350/343	350/343	343	343	343	343
6 - BB_DROP*	28/35	28/35	28/35	28/35	35	35	35	35
7 - WHEELBASE	1202	1231	1260	1290	1201	1230	1260	1289
8 - HEAD_ANGLE*	64,5º/64º	64,5º/64º	64,5º/64º	64,5º/64º	64º	64º	64º	64º
9 - SEAT_ANGLE*	77,5º/77	77,5º/77	77,5º/77	77,5º/77	77º	77º	77º	77º
10 - STANDOVER	737	737	754	774	744	744	761	781
11 - REACH	435	460	485	510	430	455	480	505
12 - STACK	619	628	637	646	623	632	641	650
13 - FORK_LENGTH	587,7							
14 - OFFSET	44							

*

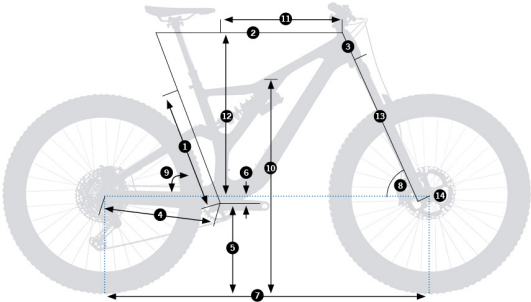

ERGONOMÍA

TALLA	BIELA	POTENCIA	MANILLAR	TIJA TELESCÓPICA
S	165	40	800	418/150
M	165	40	800	418/150
L	170	50	800	475/175
XL	170	50	800	530,7/200

* La medida del manillar es centro-centro