

ORBEA



RALLON M10.

ESTÁ EN ESTOS COLORES:



NEGRO (MATE) /
NEGRO-MORADO (BRILLO)



VERDE (MATE) / NARANJA
(BRILLO)



AZULGRIS-BRIGHT RED
(BRILLO)

ESPECIFICACIONES Y OPCIONES

CUADRO	Orbea Monocoque Race Carbon. Advanced Dynamics 160mm suspension technology. 29" wheels.Concentric Boost 12x148 rear axle. Pure Enduro geometry. Internal cable routing. ISCG05
AMORTIGUADOR	Fox DPX2 Performance 3-Position Evol custom tune 230x60mm
	Fox DHX2 Factory 2-Position Adjust SLS Spring TiN 230x60mm
	Fox Float X2 Factory 2-Position Adjust Kashima 230x60mm
HORQUILLA	Fox 36 Float Performance 170 Grip 3-Position QR15x110
	Fox 36 Float Factory 170 Grip2 RC2 QR15x110 Kashima
PLATO	SRAM Descendant CNC Eagle Dub Boost 32t
DIRECCION	Acros Alloy 1-1/8 - 1-1/2" Integrated
MANILLAR	Race Face Aeffect 35 20mm Rise 780mm
	Race Face Next R 35 Rise 800mm + Turbine R Kit (Bar+Stem)
POTENCIA	Race Face Aeffect R 35mm interface
MANETAS	SRAM GX Eagle
FRENO	Shimano XT M8120 Hydraulic Disc
	SRAM Code RSC Hydraulic Disc (180mm rotors)
PIÑON	SRAM GX XG-1275 Eagle 10-50t 12-Speed
CAMBIO	SRAM X01 Eagle
CADENA	SRAM GX Eagle 12-Speed
RUEDA	DT Swiss E-1900 Spline 30c TLR 15/110mm CL
CUBIERTA	Maxxis Minion DHF 2.50" FB 60 TPI 3C Maxx Terra Exo TR
CUBIERTA	Maxxis Minion DHR II 2.40" FB 60 TPI Dual Exo TR
PEDALES	N/A
TIJA SILLIN	OC2 Dropper 31.6mm
	Crank Brothers Highline 125mm travel
	Crank Brothers Highline 150mm travel
	Crank Brothers Highline 170mm travel
	OC2 Dropper 31.6mm 125mm travel
	OC2 Dropper 31.6mm 150mm travel
	OC2 Dropper 31.6mm 170mm travel
SILLIN	Fizik Taiga S-alloy rail
	Fizik Taiga Kium rail

GEOMETRÍA


TALLA	S/M	L	XL
1 - SEAT_TUBE	406	444	483
2 - TOP_TUBE	583	611	644
3 - HEAD_TUBE	100	110	125
4 - CHAIN_STAY		435	
5 - BB_HEIGHT*		346/339	
6 - BB_DROP*		25/32	
7 - WHEELBASE	1187	1217	1253
8 - HEAD_ANGLE*		65/64,5º	
9 - SEAT_ANGLE*		76/75	
10 - STANDOVER	737	767	781
11 - REACH	430	455	485
12 - STACK	618	627	640
13 - FORK_LENGTH		577,1	
14 - OFFSET		44	

*

ERGONOMÍA

TALLA	BIELA	POTENCIA	MANILLAR
S/M	170	40	780
LG	170	45	780
XL	170	55	780

* La medida del manillar es centro-centro

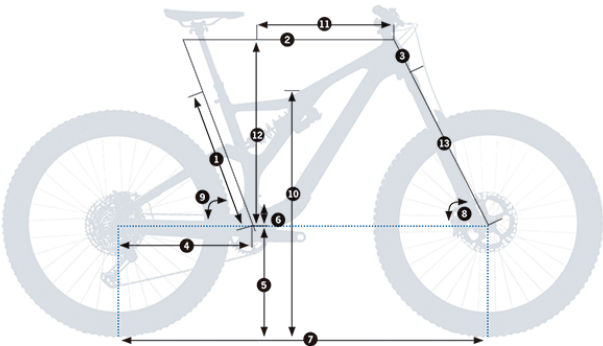

GUIACADENA	N/A
	ONE-UP ISCG05 Chainguide
EJE RUEDA DELANTERO	
	Fox Kabolt Boost
BLOQUEO REMOTO	Shimano MT-800 I-Spec EV
--	